


The Ergomat Basic Bubble Down is a light-duty ergonomic mat that will perform well in dry, non-abrasive, non-demanding applications like mail rooms, pick-lines and light assembly environments. Use in manufacturing and other more severe, unsupported industrial uses will void warranty protection.

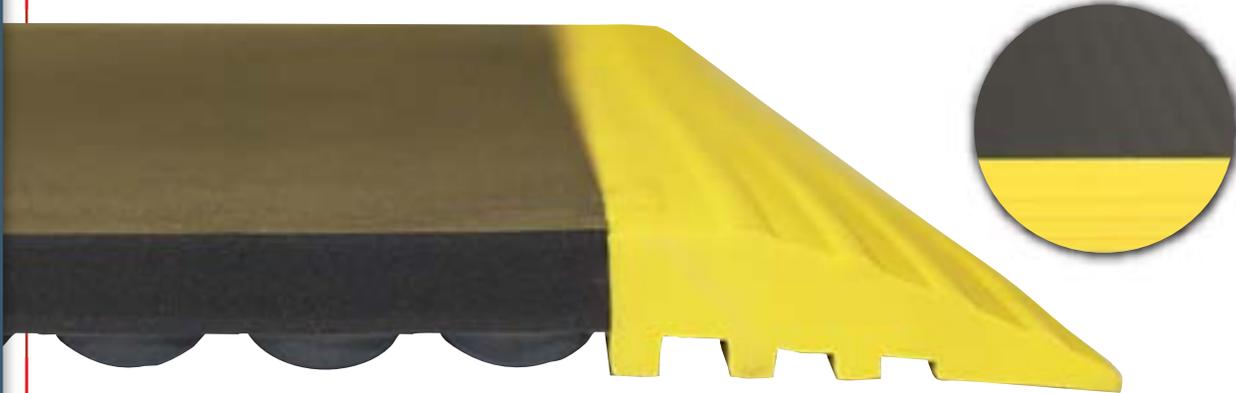

Unmatched Safety Features

- High visibility yellow beveled edges
 - They will never curl up, eliminating tripping hazards
- Any size, any shape mat, always in one piece
 - No overlapping or worn-out connecting mats, also eliminating tripping hazards

Highest Quality

- Not only anti-fatigue, but also true ergonomic benefits in a smooth mat
- Unique ergonomic designs, eliminating and preventing common problems encountered in standing environments, by stimulating the body to increase blood circulation and alertness, reducing sick leaves, workers' compensation and quality issues.

The Basic Bubble Advantage

- Uniform density, no hollow bubbles that collapse.
- Silicone & latex free

2-Year Warranty

All Ergomat product lines are conditionally warranted against normal usage* 24 hours a day, 7 days a week. The warranty does not cover damage caused by the mat being dragged or pulled from a heavy load or items being pushed or dragged across the product, such as skids or pallets. The warranty against chemicals, oils, liquids, or other matter differs with the type of mat. Please consult your dealer or an Ergomat Rep to select the correct mat for your environment. The warranty periods starts from the date of purchase. The warranty only covers the replacement of the product, no direct or indirect costs are covered.

* It is considered normal usage when a person stands or walks on the Ergomat with regular footwear in an environment where the temperature is under 25° C (77° F) and the humidity is below 80%.

ERGOMAT® Basic Bubble Down



www.ergomat.com - info@ergomat.com

US: +1-440-282-4651
 English (EU): +44 03308 280 084
 Scandinavia: +45 70 22 18 40
 German: +49 9524 30367-50
 French: +33 1 446 410 28
 Dutch: +31 73 613 05 30



Properties	Standard	ERGOMAT Basic Bubble Down
Material		Foamed Polyurethane
Color		Anthracite
Weight		2100 g +/- 50 g // 4.63 lbs +/- 0.1 lbs
Length without beveled edges		90 cm +/- 1% // 35.5" +/- 0.38"
Width without beveled edges		60 cm +/- 1% // 23.5" +/- 0.38"
Thickness		15 mm // 0.625"
Density	ISO 2781	330 kg/m ³ +/- 10 %
Hardness	DIN 53505	18-28 Sh A
Compression Pressure face = ø 100mm % by pressure of 240kg	Tinby A/S Standard	58%
Abrasion Load = 5 N	ISO 46 49 (5 N)	800 mm ³ // 31.5 in ³
Breaking Point / tensile strength	EN ISO 527-1	1 Mpa
Elongation at break	EN ISO 527-1	200%
Tearing strength	ASTM D 624	1,5 N/mm
Electrical Resistance Surface point to point % 50 RH	IEC-61340-4-1/ ESD STM7.1-2001	> 20 x 10 ⁹ Ω
Fire behavior		Not Tested
Thermal properties Minimum use Maximum use Maximum short duration	The ergonomic properties remain	0°C // 32°F 25°C // 77°F 40°C // 115°F
UV-resistance		Inferior
Hydrolytic resistance		Not Tested
Cleanroom application	EN ISO 14644-1	Not Tested
Warranty		2 years