



**The Ergomat Nitril F is made of pure Nitril rubber and is designed to increase comfort while reducing tripping hazards, body aches, quality issues, and sick leaves. This is the ultimate mat for critical environments.**

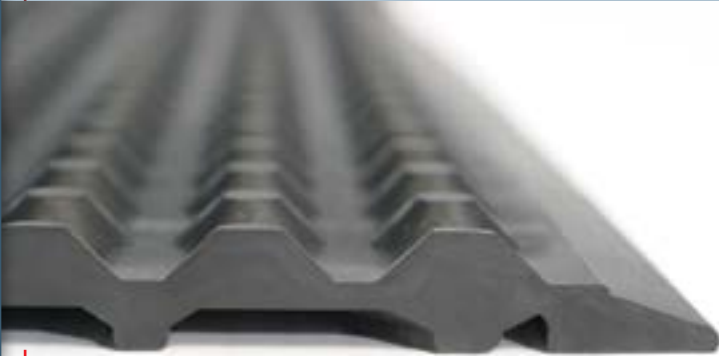

### Unmatched Safety Features

- Molded beveled edges
  - They will never curl up, eliminating tripping hazards
- Any size, any shape mat, always in one piece
  - No overlapping or worn-out connecting mats, also eliminating tripping hazards

### Highest Quality

- Raw virgin material only
  - Unbeaten durability and ergonomic relief
- Silicone & latex-free
- Not only anti-fatigue, but also true ergonomic benefits
  - Unique ergonomic designs, eliminating and preventing common problems encountered in standing environments stimulating the body to increase blood circulation and alertness that will reduce sick leave, workers' compensation and quality issues.

### The Nitril Advantage

- Chemical exposure will not affect the state of the mat; no curling up, swelling, or expanding.
  - No loss of the ergonomic properties and no tripping hazard
- Meets USDA / CFIA standards
- Fire Retardant
- Cleanroom ISO Class 5 (100)

## 3-Year Warranty

All Ergomat product lines are conditionally warranted against normal usage\* 24 hours a day, 7 days a week. The warranty does not cover damage caused by the mat being dragged or pulled from a heavy load or items being pushed or dragged across the product, such as skids or pallets. The warranty against chemicals, oils, liquids, or other matter differs with the type of mat. Please consult your dealer or an Ergomat Rep to select the correct mat for your environment. The warranty periods starts from the date of purchase. The warranty only covers the replacement of the product, no direct or indirect costs are covered.

\* It is considered normal usage when a person stands or walks on the Ergomat with regular footwear in an environment where the temperature is under 25° C (77° F) and the humidity is below 80%.

For a nominal additional charge, this mat can be supplied with yellow bevels, and/or holes for drainage and air flow.

**ERGOMAT® Nitril F**



[www.ergomat.com](http://www.ergomat.com) - [info@ergomat.com](mailto:info@ergomat.com)

US: +1-440-282-4651  
 English (EU): +44 03308 280 084  
 Scandanavia: +45 70 22 18 40  
 German: +49 9524 30367-50  
 French: +33 1 446 410 28  
 Dutch: +31 73 613 05 30



MATTING



DURASTRIPE



FURNITURE



FIRST AID



FACILITY SAFETY



LED SOLUTIONS

<b>Properties</b>	<b>Standard</b>	<b>ERGOMAT Nitril F</b>
<b>Material</b>		Nitrile
<b>Color</b>		Black
<b>Weight</b>		3600 g +/- 50 g // 8 lbs +/- 1.75 oz
<b>Length without beveled edges</b>		91,4 cm +/- 1% // 36" +/- 1%
<b>Width without beveled edges</b>		60 cm +/- 1% // 23.6" +/- 1%
<b>Thickness</b>		11 mm // 0.43"
<b>Density</b>	ISO 2781	1370 kg/m <sup>3</sup>
<b>Hardness</b>	ISO 868	50-60 Sh A
<b>Friction</b>	AVK Standard	45 N
<b>Abrasion Load = 5 N</b>	ISO 46 49 (5 N)	92 mm <sup>3</sup> // 3.6 in <sup>3</sup>
<b>Elongation at break</b>	ISO 37	790%
<b>Tearing strength</b>	ISO 37 Method C	28 N/mm
<b>Insulation Resistance</b>	EN 60 335-1994	28 N/mm
<b>Electrical Resistance Surface point to point % 50 RH</b>	IEC-61340 4-1/ ESD STM7.1-2001	>1 x 10 <sup>10</sup> Ω
<b>Thermal Conductance</b>	Table Value	3,3 W/m/°C
<b>Fire Behavior</b>	EN 13501-1 (DIN 4102-B1 Part 14)	Cfl-s1 (B)
<b>Thermal properties</b> Minimum use Maximum use Maximum short duration	The ergonomic properties remain	-40°C // -40°F 90°C // 194°F 150°C // 300°F
<b>Flame Point</b>	Table Value	400°C // 752°F
<b>UV-resistance</b>		Inferior
<b>Cleanroom application</b>	EN ISO 14644-1	ISO Class 5 (100)
<b>Warranty</b>		3 years