
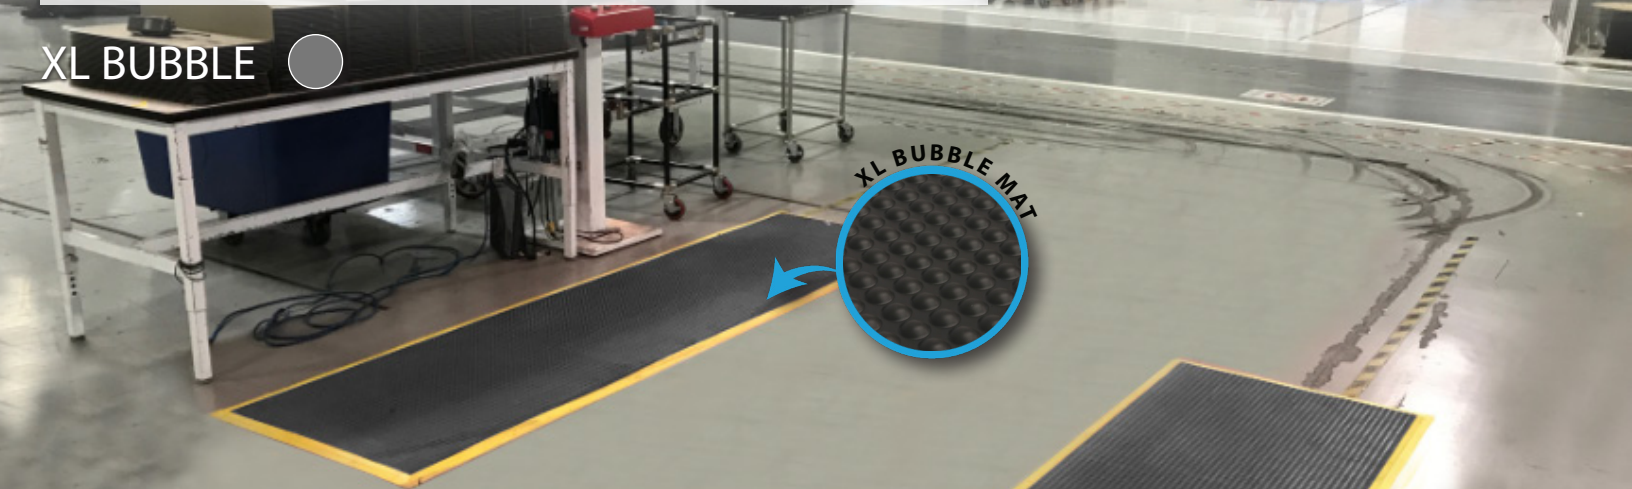


## Ergomat XL Bubble Mat

The Ergomat XL Bubble is made of pure polyurethane and is designed to increase comfort while reducing tripping hazards, body aches, quality issues, and sick leaves. This is the ultimate 1" thick ergonomic mat for dry environments or where static control is a must.

XL BUBBLE 



### Profile

XL Bubble Mat



Thickness 1" (25 mm)

## BENEFITS

**ERGONOMIC:** Designed to stimulate circulation in feet, legs and lower back. Circulation is stimulated by the unique, patented surface profile of Ergomat mats, which forces muscular response.

**BEVELED EDGES:** Always comes with yellow bevels. Bevels will never curl up, eliminating trip hazards.

**ANTI-STATIC:** Ideal for environments requiring static control.

**ANY SIZE ANY SHAPE:** Can be custom made in any size and shape, creating one continuous surface to eliminate seams and trip hazards.

**SILICON FREE:** All Ergomat mats are silicon free.

**TRUE WARRANTY:** Ergomat stands 100% behind our products with full replacement coverage if our product fails to perform as promoted within that period. At Ergomat we call this a *True Warranty*.

[www.ergomat.com](http://www.ergomat.com) - [info@ergomat.com](mailto:info@ergomat.com)

North & South America: +1-440-282-4651 | English (EU): +44 3308 280 084 | Danish: +45 702 21 840 | Dutch: +31 73 61 30 530 | Swedish: +46 42 16 36 00  
German: +49 9542 30 367-50 | French: +33 1 446 410 28

# Ergomat XL Bubble Mat

## XL Bubble

|  |   |
|--|---|
| Material.....  | Foamed Polyurethane   |
| Color .....  | Grey  |
| Weight.....  | 3900 g +/- 50 g // 8.6 lbs +/- 0.1 lbs                      |
| Length without beveled edges ..  | 87.6 cm +/- 1% // 34.5" +/- 0.38"                           |
| Width without beveled edges...   | 59 cm +/- 1% // 23.25" +/- 0.38"                            |
| Thickness .....  | 25 mm // 1"   |
| Density.....   | 380 kg/m <sup>3</sup> +/- 10 %<br>ISO 2781                  |
| Hardness .....   | 22-30 Sh A DIN 53505  |
| Compression<br>Pressure face = ø 100mm<br>% by pressure of 240kg ..... | 50% Tinby A/S Standard                                      |
| Abrasion Load = 5 N .....  | 180 mm <sup>3</sup> // 7 in <sup>3</sup><br>ISO 46 49 (5 N) |
| Electrical Resistance<br>Surface point to point<br>% 50 RH .....       | 1x10 <sup>9</sup> Ω-5x10 <sup>9</sup> Ω<br>ESDSTM7          |
| Breaking Point/Tensile Strength  | 2 Mpa EN ISO 527-1  |
| Elongation at Break .....  | 500% EN ISO 527-1   |
| Tearing Strength .....   | 4 N/mm ASTM D 624   |
| Thermal properties   |   |
| Minimum use.....   | 0°C // 32°F   |
| Maximum use .....  | 32°C // 90°F  |
| Maximum short duration   | 40°C // 115°F   |
| UV-Resistance .....  | Inferior  |
| Hydrolic Resistance .....  | Inferior  |
| Warranty .....   | 5 years   |